






# OPTIONS


## Automatic Document Feeders



## USB Card Readers

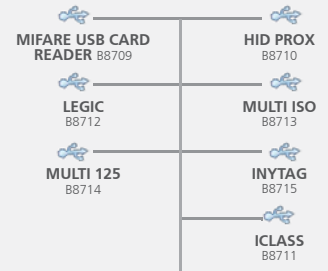

## Finishers

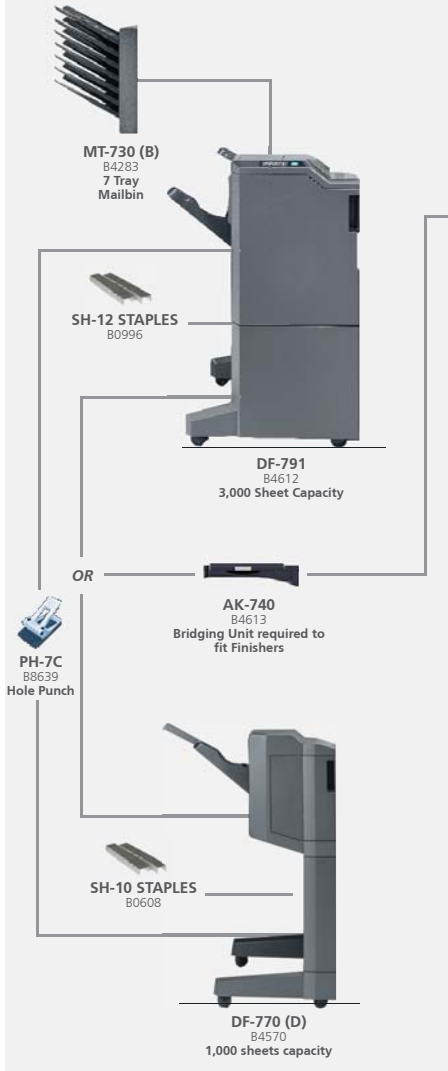


## CARD READER HOLDER (E)



d-COPIA 3002MF  
B4609  
d-COPIA 3502MF  
B4610


## Paper Trays

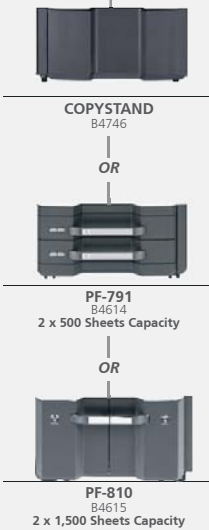

## Fax



## IB-51 (B4368, WIFI LAN)



## Consumables

TONER CARTRIDGE  
d-Copia 3002MF  
B1088

TONER CARTRIDGE  
d-Copia 3502MF  
B1089

MAINTENANCE KIT  
B1090



d-Copia 3002MF / d-Copia 3502MF with DF-770 (D) Finisher



d-Copia 3002MF / d-Copia 3502MF with DF-791+ MT-730(B) Finishers

# TECHNICAL SPECIFICATIONS

## GENERAL

<b>Type: Desktop/Stand-alone</b>	Stand-alone
<b>Technology Speed</b>	Laser semiconductor, with amorphous silicon technology d-Copia 3002MF: 30/15 ppm A4/A3 d-Copia 3502MF: 35/17 ppm A4/A3
<b>Integrated Duplex</b>	A3/A5R (60-163 g/m <sup>2</sup> )
<b>Copy format (Max / Min)</b>	Max/Min A3/A6R
<b>Power Consumption</b>	220-240V, 50 Hz d-Copia 3002MF: max 620 W (basic configuration) 730 W (full option) d-Copia 3502MF: max 660 W (basic configuration) 760 W (full option) Absorption in energy-saving standby mode 1.6 W (both models)
<b>Total Electricity Consumption</b>	d-Copia 3002MF: 1.935 kWh d-Copia 3502MF: 2.243 kWh (basic configuration)
<b>Warm-up Time</b>	23 seconds (from power on) 15 seconds (from energy saving) 10 seconds (from low power mode)
<b>Security Standards</b>	ISO/IEC 15408 EAL3, PP IEEE2600.1 Local & network authentication Kerberos,NTLMv1, NTLmv2, Network data encryption IPsec/IKEv.2, SNMPv3, SSL (Server IPPS/HTTPS); Data overwriting on hard disk with optional Data Security kit (E)
<b>Dimensions (WxDxH)</b>	594 x 738 x 683 mm (without options) 1,598 x 765 x 1,196 mm (with options)
<b>Weight</b>	67 kg without options and toner

## PRINTER

<b>Print Speed</b>	d-Copia 3002MF: 30 / 15 ppm A4 / A3 (simplex) 30 / 11 ppm A4 / A3 (duplex) d-Copia 3502MF: 35 / 17 ppm A4 / A3 (simplex) 35 / 12 ppm A4 / A3 (duplex)
<b>Time to First Print</b>	4.2 seconds (3002MF / 3502MF)
<b>Interfaces</b>	1 x 1000 BASE-T/100 base-TX/10 base-T network interface, 4 x USB 2.0 host interfaces, 1 X High Speed USB 2.0, 2 x PSTN interfaces (with 2 Fax System W B options)
<b>CPU</b>	QorIQ P1022 (Dual Core) 800MHz
<b>Languages</b>	PCL6, PCL5e, PCL-XL, KPDL3 (PS 3 compatible), XPS
<b>Resolution</b>	600 x 600 dpi
<b>Fonts</b>	93 (PCL6), 136 Postscript (KPDL 3), 8 Win Vista
<b>Operating Systems</b>	Windows XP, Vista, Win 7, Win 8, Server 2003, Server 2008, Server 2008 R.2, Server 2012, Mac OS X 10.5 and higher versions supported with PPD series drivers, Linux (all versions) supported with PPD series drivers
<b>AirPrint</b>	Printing from iOS device (Your Network Administrator must set BONJOUR & IPP to ON to enable this feature)

## SCANNER

<b>Simplex Scan Speed (A4, 300 dpi)</b>	With DP-770 (B) 75 ipm Mono, 50 ipm Colour With DP-772 80 ipm Mono, 50 ipm Colour With DP-773 48 ipm Mono, 48 ipm Colour
<b>Duplex Scan Speed (A4, 300 dpi)</b>	With DP-770 (B) 45 ipm Mono, 34 ipm Colour With DP-772 160 ipm Mono, 80 ipm Colour With DP-773 15 ipm Mono, 15 ipm Colour
<b>Simplex Scan Speed (A4, 600 dpi)</b>	With DP-770 (B) 55 ipm Mono, 30 ipm Colour With DP-772 55 ipm Mono, 30 ipm Colour With DP-773 25 ipm Mono, 25 ipm Colour
<b>Duplex Scan Speed (A4, 600 dpi)</b>	With DP-770 (B) 33 ipm Mono, 20 ipm Colour With DP-772 38 ipm Mono, 38 ipm Colour With DP-773 10 ipm Mono, 10 ipm Colour
<b>Resolution</b>	600, 400, 300, 200 dpi, 200 x 100 dpi, 200 x 400 dpi
<b>Colour Scanning</b>	Mono, Colour, ACS mixed mode
<b>Scan Format (Max)</b>	A3
<b>Image Format</b>	TIFF, PDF, XPS, JPEG, High Compression PDF, Searchable PDF (option)
<b>Drivers</b>	TWAIN driver, WIA driver
<b>Functions</b>	Scan to PC (SMB), Scan to E-mail (SMTP), Scan to FTP, Scan to USB, TWAIN scan/WIA, WSD scan
<b>Operating Systems</b>	Windows XP (not for WIA), Vista, WIN 7, Server 2003 (not for WIA), Win 8, Server 2008, Server 2008 R.2, Server 2012

Product performances are referred to as appropriate use under optimal conditions. The registered trademarks are the property of their respective owners.

The support and availability of the listed specifications and functionalities varies depending upon operating systems, applications, network protocols as well as network and system configurations. All information relating to specification and accessories is subject to change without notice. Olivetti does not guarantee that any prices or specifications mentioned will be error-free.

The registered trademarks are the property of their respective owners.

The d-Copia 3002MF/3502MF are distributed by Olivetti S.p.A.

(01/14) - Code: 29128-00

OLIVETTI UK LIMITED  
www.olivetti.co.uk



## COPIER

<b>Scanning Method</b>	Fixed platen
<b>Time to First Copy</b>	3.6 seconds (d-Copia 3002MF/d-Copia 3502MF) (from Platen) without ADF 5.6 seconds (d-Copia 3002MF/d-Copia 3502MF) with ADF DP-772
<b>Multi Copy Memory</b>	1- 999 copies Standard 2 GB RAM, 160 GB hard disk, standard SATA 2.5"
<b>Paper Capacity</b>	Two 500-sheet trays (80 g/m <sup>2</sup> ) + by-pass tray (100 sheets)
<b>Formats with Paper Trays</b>	A3-A5R
<b>Formats with By-pass Tray</b>	A3-A6R (max 100 sheets 80g/m <sup>2</sup> )
<b>Paper weight Front Trays</b>	60-163 g/m <sup>2</sup> Duplex: 60-163 g/m <sup>2</sup> By-pass MPT: 45-256 g/m <sup>2</sup> (A4), 52-163g/m <sup>2</sup> (formats larger than A4)
<b>Capacity Catch Tray</b>	Max 250 sheets (80 g/m <sup>2</sup> )
<b>Zoom</b>	25% to 400% in 1% increments

## FAX SYSTEM (W) B (OPTIONAL)

<b>Compatibility</b>	ITU-TS G.3
<b>Function</b>	Network fax
<b>Compression Methods</b>	JBIG, MMR, MR, MH with ECM (Error Correction Mode)
<b>Modem Speed</b>	33.6 kbps with automatic fall back
<b>Transmission Time</b>	3 seconds (JBIG at 33.6 kbps)
<b>Memory Back-up</b>	Available (700 pages)
<b>Fast Dial Numbers</b>	1,000 numbers
<b>Broadcasting</b>	Up to 500 numbers
<b>Dual Fax Function</b>	With installation of 2 fax systems (W) B
<b>Internet Fax Kit (A)</b>	Compatible with T.37 standard

## OTHER OPTIONS

<b>Automatic Document Feed DP-772</b>	Type: Dual Scan Formats / paper capacity: A3-A6R / max 175 sheets (80 g/m <sup>2</sup> ) Paper weight simplex / duplex: 35-220 g/m <sup>2</sup> / 50-220 g/m <sup>2</sup>
<b>Automatic Document Feed DP-770 (B)</b>	Formats / paper capacity: A3-A5R / max 100 sheets (80 g/m <sup>2</sup> ) Paper weight simplex / duplex: 45-160 g/m <sup>2</sup> / 50-120 g/m <sup>2</sup>
<b>Automatic Document Feed DP-773</b>	Type: RADF Formats / paper capacity: A3-A5R / max 50 sheets (80 g/m <sup>2</sup> ) Paper weight simplex / duplex: 45-160 g/m <sup>2</sup> / 50-120 g/m <sup>2</sup>
<b>Tray Unit PF-791</b>	Two 500-sheet trays (80 g/m <sup>2</sup> ) Paper weight / format: 60-256 g/m <sup>2</sup> / A3-A5R
<b>Tray Unit PF-810</b>	Two 1,500-sheet trays (80 g/m <sup>2</sup> ) Paper weight / format: 60-256 g/m <sup>2</sup> / A4
<b>Finisher DF-791</b>	3,000 A4 sheets or 1,500 A3 sheets Two catch trays Stapling max 65 A4 sheets or 30 A3 sheets
<b>Finisher DF-770 (D)</b>	1,000 A4 sheets or 500 A3 sheets Two catch trays Stapling max 50 A4 sheets or 30 A3 sheets
<b>Connection Kit AK-740</b>	Kit for DF-770 (D) or DF-791
<b>Hole Punch (PH-7C)</b>	DF-770 (D) and DF-791, paper format A3-A5R Paper weight 45-300g/m <sup>2</sup>
<b>Multiple Tray MT-730 (B)</b>	For DF-791 Number of trays: 7 for 100 A4 sheets or 50 A3 sheets Paper format:A3-A5R
<b>Data Security Kit (E)</b>	Security Kit for encryption of data stored on hard disk and fax memory
<b>USB RFID Card Readers for Authentication</b>	HID prox, MIFARE, LEGIC, MULTI ISO, MULTI 125, iClass, Indytag
<b>Card Reader Holder</b>	Holder for USB Card Reader
<b>DT-730 (B)</b>	Right side Document Support Tray (Table)